


In-tank Filters


Flows to 380 L/min (100 USgpm)

OTM Tank Mounted Strainers



DESIGN SPECIFICATIONS

Rated flow:	See chart below	
Housing and Element Compatibility:	Compatible with all petroleum based fluids, water glycols, synthetic fluids and phosphate ester fluids	
Temp range:	-28 to +100°C (-20 to +210°F)	
Material:	Stainless Steel Cast Iron	
Dry weight:	Length 1	0,1 kg. (0.20 lbs.)
(Approximate with element)	Length 2	0,2 kg. (0.55 lbs.)
	Length 3	0,3 kg. (0.65 lbs.)
	Length 4	0,5 kg. (1.05 lbs.)
	Length 5	1,0 kg. (2.15 lbs.)
	Length 6	1,8 kg. (4.05 lbs.)

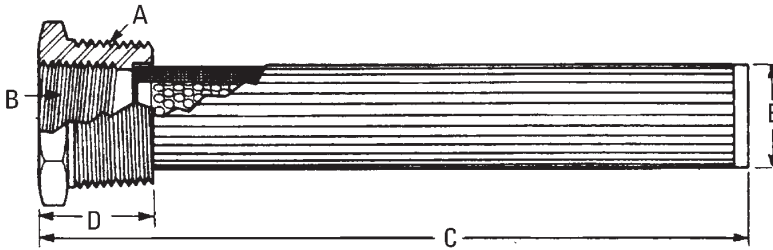

MODEL CODE	A	B	C	D	E	SCREEN AREA	RATED FLOW
						(sq. inch)	(USgpm)
OTM1	1" NPT	1/2" NPT	(5.34)	(1.06)	(1.17)	35	5
OTM2	1 1/4" NPT	3/4" NPT	(8.17)	(1.20)	(1.36)	64	10
OTM3	1 1/2" NPT	1" NPT	(8.20)	(1.22)	(1.66)	86	15
OTM4	2" NPT	1 1/4" NPT	(9.04)	(1.35)	(2.12)	125	25
OTM5	3" NPT	2" NPT	(9.70)	(1.70)	(3.00)	260	50
OTM6	4" NPT	3" NPT	(11.30)	(1.80)	(4.00)	315	100

Items not in bold are non-standard and may have a longer lead time